
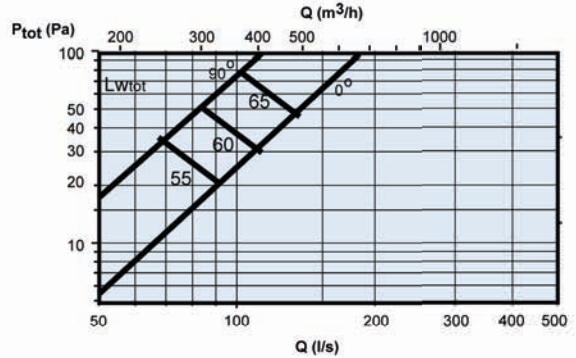




LDS.160 k=14,5 (l/s); 52,2 (m³/h)

LDS.200 k=20,8 (l/s); 74,5 (m³/h)

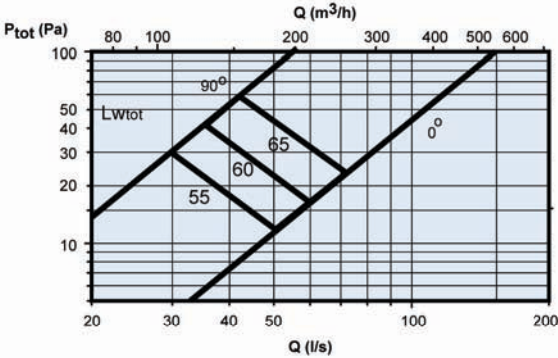


LDS.250 k=30,5 (l/s); 110 (m³/h)

LDS.315 k=50,5 (l/s); 182 (m³/h)

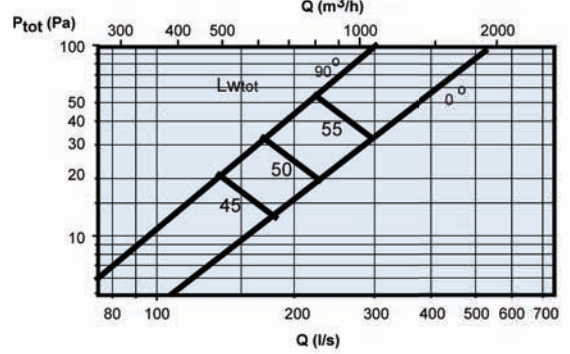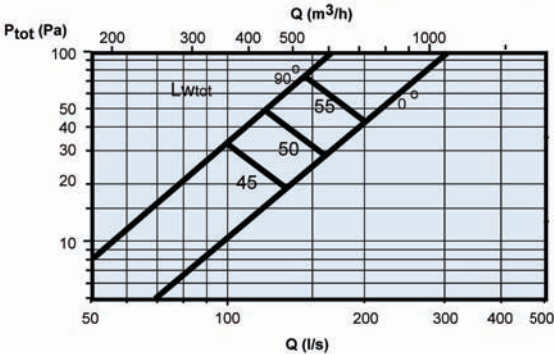

LDS.400 k=80,9 (l/s); 291 (m³/h)

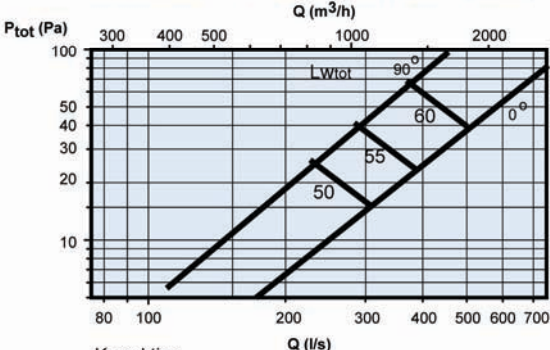

Ø	Dämpning i dB för medelfrekvens						
	Hz						
	125	250	500	1000	2000	4000	8000
160	4	8	16	25	30	22	15
200	4	8	15	26	31	21	15
250	3	7	15	26	25	15	15
315	3	8	15	25	20	15	15
400	3	8	13	23	18	13	13

Korrektion	125	250	500	1000	2000	4000	8000
	-1	-10	-17	-22	-25	-32	-40